


INSPECTION DIMENSION:(A)~(J)

SPECIFICATIONS

1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 1 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
Housing:PA9T, UL 94V-0, Color:Blue.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Rivet:Copper Alloy.
Screw:Copper Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
Screw:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

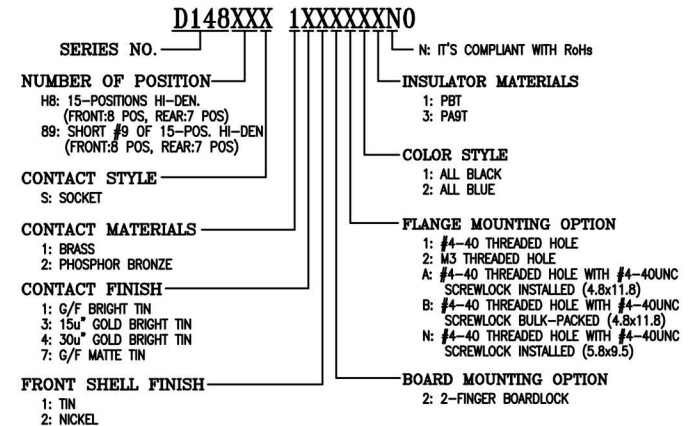

				FEN YING®	
				ENTERPRISES CO.,LTD	
AO	An issue.			2011.12.01	
REV.	CONTENTS			DATE	
 UNLESS OTHERWISE SPECIFIED TOLERANCE mm: .00 = ±0.25 .000 = ±0.13 Ang: 0.0 = ±2°	Drawn	Shao Jianfeng		Title: <u>D148 SERIES</u> D-SUB 1.70mm FOOTPRINT SHORT BODY HIGH DENSITY	
	Designed	He Wei			
	Approval	Lee JIun De			
Scale	1:1	Size	A4	File NO.	C-ED-B-D148-010
SHEET	1	Units	mm	Drawing NO.	D14889S1X22N23N0