


INSPECTION DIMENSION:(A)~(M)

SPECIFICATIONS

1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 15.8 Kgf Max.
- 1.7 Total Unmating Force: 1.8 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.
Shell:Tin Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
3. This Product is RoHS Compliance Product.

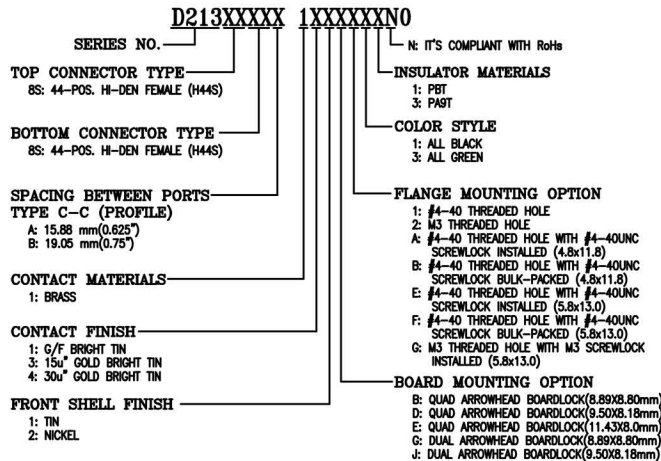

				FEN YING®		ENTERPRISES CO.,LTD		
A0	An issue.	2018.10.18		Title: <u>D213 SERIES</u> D-SUB HIGH DENSITY CONNECTOR 0.350"(8.89) FOOTPRINT, DUAL PORT				
REV.	CONTENTS	DATE						
<p>UNLESS OTHERWISE SPECIFIED TOLERANCE mm: 00 = ±0.25 000 = ±0.13 Ang: 0.0 = ±2</p>	Drawn	Shao Jianfeng		File NO.	C-ED-B-D213-003			
	Designed	He Wei			Drawing NO.	D21388S8B1X1E111N0		
	Approval	Lee Jun De						
Scale	1:1	Size	A4					
SHEET	1	Units	mm					