
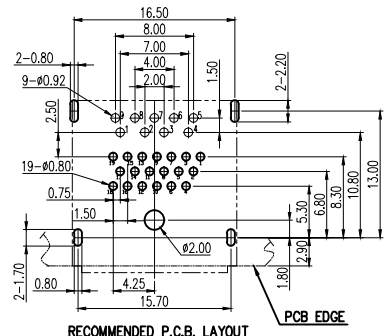

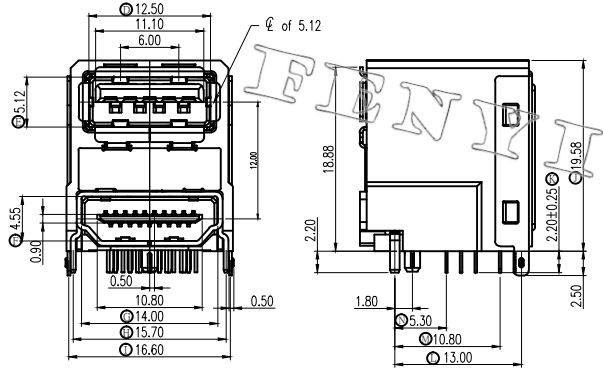


1 2 3 4 5 6 7 8

E
D
C
B
A

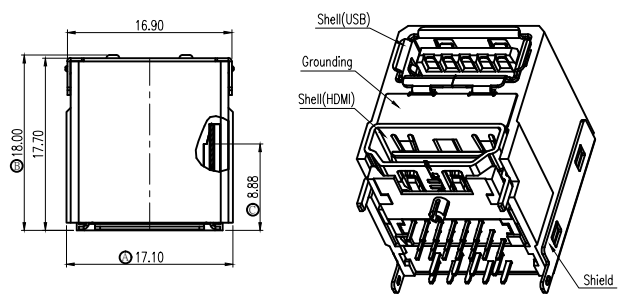


SPECIFICATIONS

1. USB
 - 1.1 Voltage: 250 VAC(RMS) Max.
 - 1.2 Current Rating: 1.5 Ampere per Contact
 - 1.3 Contact Resistance: 25 Milliohms Max.
 - 1.4 Insulation Resistance: 1000 Megohms Min.
 - 1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
 - 1.6 Total Mating Force: 3.57 Kgf Max.
 - 1.7 Total Unmating Force: 1.02 Kgf Min.
 - 1.8 Operating Temperature: -55°C to +85°C
2. HDMI
 - 2.1 Voltage: 40 VAC(RMS) Max.
 - 2.2 Current Rating: 0.5 Ampere per Contact
 - 2.3 Contact Resistance: 30 Milliohms Max.
 - 2.4 Insulation Resistance: 100 Megohms Min.
 - 2.5 Dielectric Withstanding Voltage: 500V DC(RMS)
 - 2.6 Total Mating Force: 4.5 Kgf Max.
 - 2.7 Total Unmating Force: 1.0 Kgf Min.
 - 2.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
 - Housing(USB):PBT, UL 94V-0, Color:Black.
 - Housing(HDMI):LCP, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell(USB):Elastic Steel.
 - Shell(HDMI):Copper Alloy.
 - Shield:SPCC.
 - Grounding:Stainless Steel.
2. FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Area.
 - Shell(USB):Nickel Plated.
 - Shell(HDMI):Nickel Plated.
 - Shield:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

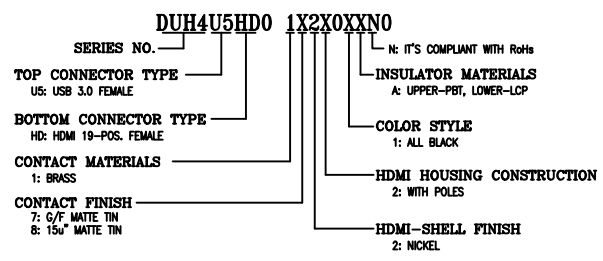

AD		An issue.		2016.03.28	
REV.	CONTENTS			DATE	
①	Drawn	Yang Xiang		Title: DUH4 SERIES	
	Designed	He Wei			
	Approval	Lee Jun De			
UNLESS OTHERWISE SPECIFIED TOLERANCE mm:		Scale	1:1	Size	A4
∅: ±0.25		SHEET	1	Units	mm
∅: ±0.13		File NO.		C-ED-B-DUH4-001	
Ang: ±2°		Drawing NO.		DUH4U5HD01X2201AN0	

1 2 3 4 5 6 7 8